




PROWADNICA SAMOSMARNA – KSZTAŁT „L”
L-GIB WITH ADAPT AREA

KVA

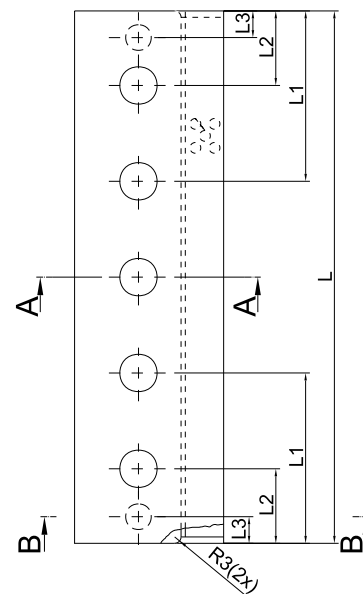

Mat.:
Brąz aluminiowy + grafit
Aluminium bronze + graphite

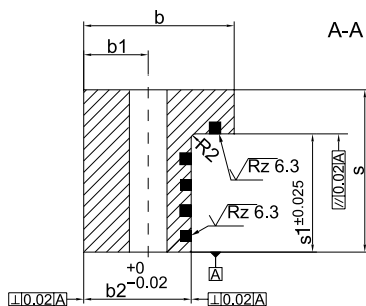

b	L	s	b1	b2	L1	L2	L3	s1	Sposób mocowania Cheese head screw		Kołek bazujący Dowel pin		Nr kat. / Item no.	
									DIN 912	szt. / pce	DIN 7979	Szt. / pce		
45	100	50,5	15	30		27,5	10	34,5	M12	2	10 × 60	2	KVA-19050	
	125												-	KVA-19049
	160												10	KVA-19051
55	100	55,5	20	37	-	27,5	10	39,5	M12	2	10 × 60	2	KVA-19052	
	160												KVA-19053	
70	160	75,5	30	50		35	12,5	55,5	M16	2	12 × 70	2	KVA-19054	
	200												KVA-19055	
	250												KVA-19056	
	400												125	KVA-19063
85	160	90,5	38	63	-	42,5	15	65,5	M20	2	16 × 70	2	KVA-19057	
	200												KVA-19058	
	250												KVA-19059	
	400												125	KVA-19064
100	160	100,5	45	75	-	45	15	75,5	M24	2	16 × 70	2	KVA-19060	
	200												KVA-19061	
	250												KVA-19062	