


TWS

PODKŁADKA DLA SPRĘŻYN ELASTOMEROWYCH WASHER FOR ELASTOMER SPRINGS




Mat.: CK45

Średnica sprężyny Spring diameter	d ₁	d ₂	s	Nr kat. / Item no.
16	6,5	20	4	TWS-016
20	8,5	25	4	TWS-020
25	10,5	32	5	TWS-025
32	13,5	40	5	TWS-032
40	13,5	50	5	TWS-040
50	16,5	60	6	TWS-050
63	16,5	80	6	TWS-063
80	20,5	100	8	TWS-080
100	20,5	120	8	TWS-100
125	26	150	8	TWS-125

EVS

ODKLEJACZ SPRĘŻYNOWY – DŁUGI SKOK SPRING PLUNGER – LONG STROKE

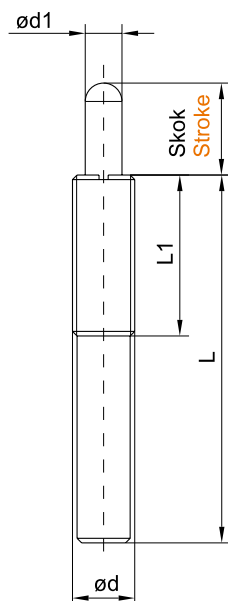

ød	L	Skok Stroke	ød1	L1	Siła Spring tension min/max [N]	Nr kat. / Item no.	Siła Spring tension min/max [N]	Nr kat. / Item no.
M12	43	10	5,5	35	7 / 40	EVS-19430	4 / 20	EVS-19441
M16	50		20 / 100		EVS-19431	10 / 50	EVS-19442	
	60	15	8		27 / 80	EVS-19432	13 / 40	EVS-19443
		20	15 / 80		EVS-19433	10 / 40	EVS-19444	
	85	17 / 80	EVS-19435		13 / 40	EVS-19445		
125	30	20 / 80	EVS-19436		18 / 40	EVS-19447		
M24	60	15	10	45	40 / 200	EVS-19439	20 / 100	EVS-19448
M30	70	20	15		50 / 300	EVS-19440	30 / 150	EVS-19450