


LAR WYPYCHACZ PŁASKI SPECJALNY LAR-4

BLADE EJECTOR PIN THROUGH-HARDENED, WITH 4 ANGLE RADII LAR-4

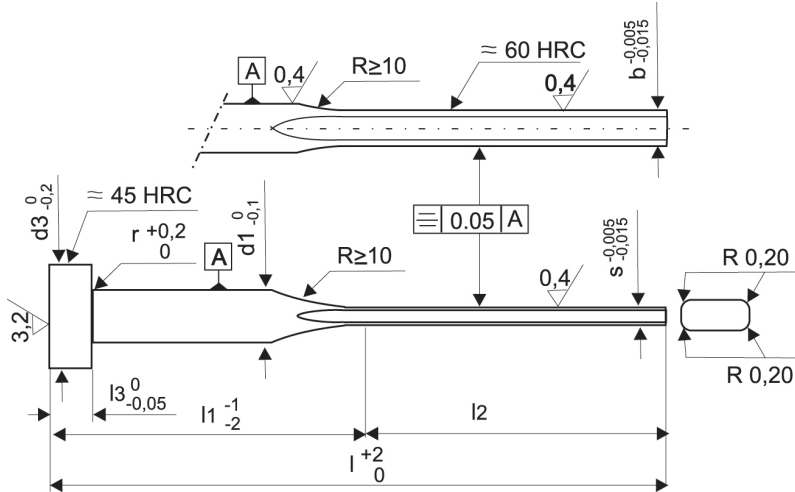

MATERIAŁ: № 1.2210 (F 522) ODPORNOŚĆ TEMPERATUROWA: MIN 220°C
 MATERIAL: № 1.2210 (F 522) TEMPER RESISTANCE: At least 220°C

TWARDOŚĆ: Trzpień: (d1): 60±2 HRc
 Łeb: 45±5 HRc
 HARDNESS: Shaft: (d1): 60±2 HRc
 Head: 45±5 HRc

r	d1	d3	l1	l2	l3	s	b	l				
0,3	3,0	6,0	40	40	3,0	0,5	2,8	80				
			50	50				100				
			60	65				125				
			80	80				160				
			40	40				0,6	80			
			50	50				100				
			60	65		125	80	80	0,8	80		
			40	40		100	50	50	1,0	100		
			60	65		125	80	80		160		
			80	80		200	40	40		100		
			50	50		100	60	65		125		
			60	65		125	80	80		160		
80	80	200										
0,3	4,2	8,0	40	40	3,0	0,5	3,8	80				
			50	50				100				
			60	65				125				
			80	80				160				
			40	40				0,6	80			
			50	50				100				
			60	65				125	80	80	1,5	100
			50	50				100	60	65		125
			60	65				125	80	80		160
			80	80				200	40	40		100
			50	50				100	60	65		125
			60	65				125	80	80		160
			80	80		200	100	100	250			
			100	100		315	125	125	315			
			30	33		0,8	63					
			40	40		80						
			50	50		100						
			60	65		125						
			80	80		160						
			100	100		200						
			125	125		250						
			30	33		1,0	63					
			40	40		80						
			50	50		100						
60	65	125										
80	80	160										
100	100	200										
125	125	250										
160	155	315										

r	d1	d3	l1	l2	l3	s	b	l								
0,3	4,2	8,0	40	40	3,0	1,2	3,8	80								
			50	50				100								
			60	65				125								
			80	80				160								
			100	100				200								
			125	125				250								
			160	155		315	40	40	1,0	80						
			50	50		100	60	65		125						
			80	80		160	100	100		200						
			125	125		250	40	40		100						
			50	50		100	60	65		125						
			80	80		160										
0,3	5,0	10	40	40	3,0	1,0	4,5	80								
			50	50				100								
			60	65				125								
			80	80				160								
			100	100				200								
			125	125				250								
			160	155				315	40	40	1,2	80				
			50	50				100	60	65		125				
			80	80				160	100	100		200				
			125	125				250	40	40		100				
			50	50				100	60	65		125				
			80	80				160								
			0,5	6,0		12	40	40	5,0	1,0	5,5	80				
							50	50				100				
							60	65				125				
							80	80				160				
							100	100				200				
							125	125				250				
							160	155				315	40	40	1,2	80
							50	50				100	60	65		125
							80	80				160	100	100		200
							125	125				250	40	40		100
							50	50				100	60	65		125
							80	80				160				
0,5	6,0	12			80		80	5,0		1,5	9,5	160				
					100		100					200				
					125		125					250				
					160		155					315				
					100		100					200				
					125		125					250				
					160		155			315	80	80	2,0	160		
					100		100			200	100	100		250		
					125		125			250	125	125		315		
					160		155			315	80	80		160		
					100		100			200	100	100		250		
					125		125			250						
0,8	12	18	100	100	7,0	2,0	11,5	200								
			125	125				250								
			160	155				315								
			100	100				200								
			125	125				250								
			160	155				315								
			100	100		200	100	100	2,5	200						
			125	125		250	125	125		315						
			160	155		315	100	100		200						
			125	125		250	160	155		315						
			100	100		200										
			125	125		250										

r	d1	d3	l1	l2	l3	s	b	l		
0,5	6,0	12	50	50	5,0	1,5	5,5	100		
			60	65				125		
			80	80				160		
			100	100				200		
			125	125				250		
			160	155				315		
			50	50		2,0	100			
			60	65		125	80	80	160	
			100	100		200	100	100	250	
			125	125		250	125	125	315	
			160	155		315				
			0,5	8,0		14	50	50	5,0	1,2
60	65	125								
80	80	160								
100	100	200								
125	125	250								
160	155	315								
50	50	1,5			100					
60	65	125			80		80	160		
100	100	200			100		100	250		
125	125	250			125		125	315		
160	155	315								
0,5	8,0	14			80		80	5,0		1,5
			100	100	200					
			125	125	250					
			160	155	315					
			100	100	200					
			125	125	250					
			160	155	315	80	80		2,0	160
			100	100	200	100	100			250
			125	125	250	125	125			315
			160	155	315					
			100	100	200					
			125	125	250					
0,8	12	18	100	100	7,0	2,0	11,5	200		
			125	125				250		
			160	155				315		
			100	100				200		
			125	125				250		
			160	155				315		
			100	100		200	100	100	2,5	200
			125	125		250	125	125		315
			160	155		315	100	100		200
			125	125		250	160	155		315
			100	100		200				
			125	125		250				

PRZYKŁAD ZAMAWIANIA: Wypychacz LAR: s=0,8 mm, b=2,8 mm l=125 mm
 ORDER EXAMPLE: Ejector pin LAR: s=0,8 mm, b=2,8 mm l=125 mm

Nr. katalogowy: LAR-08280125
 Order number: LAR-08280125